



## VE/GTiR RWD Oil Pick Up Part #100017

**WARNING!** Please read the whole guide before installing this part.

### **Legals:**

TAARKS oil pick up has been designed and is intended for off-road use only. The installation of this part on a vehicle intended for use on public roads may violate laws and regulations in your country/state. Additionally, this part is sold with a LIMITED warranty that only covers defects in manufacturing. This warranty does not cover any damage incurred by using this part. The installation of this part may also void any vehicle warranties. Refer to a performance specialist for proper installation.

After opening the packaging please check to see if any parts are missing or damaged. If something is missing or damaged please contact us immediately. Do not install the product.

Do not modify this part in any way. Modifying the part may result in failure of the part and voids all possible warranties.

### **Installation Guide**

Install the stainless steel bracket onto the engine cradle using the supplied M6x16mm bolt and spring washer. Once the bolt has started gently pull the bracket up while tightening the bolt.



Once the bolt starts to compress the spring washer gently push the bracket down while you continue tightening the bolt. Nip the bolt up (do not tighten just yet).



Bolt has been nipped up.




Install the supplied o-ring into the flange of the pick up.



Using the supplied M8x20mm bolts and spring washers mount the pick up onto the oil pump, be careful that the o-ring does not come out of it's groove. Do not tighten the bolts just yet, nip them up.



Bolts nipped up.

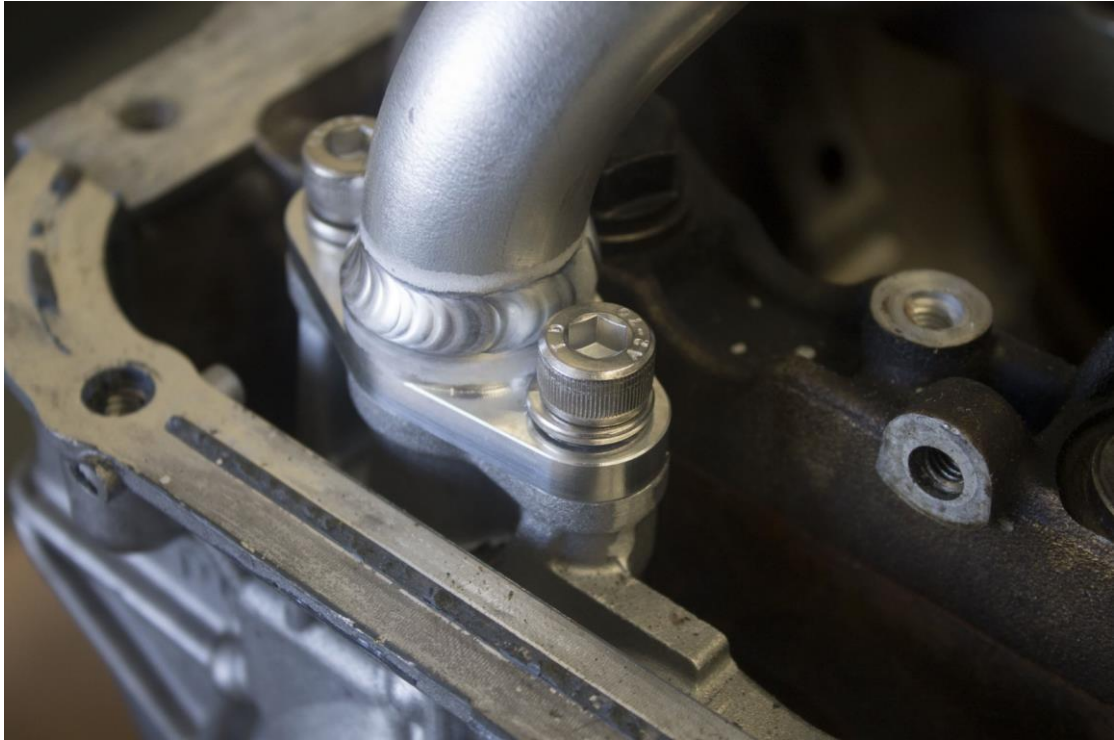

Due to the welding process and nissan's machining of the oil pump/cradle you may need to slightly bend the stainless steel bracket to line up with the mounting hole on the pick up.



This can be done by applying gentle pressure by hand until the bracket lines up. If the bracket springs back when pressure is released you will need to apply more pressure.

Once lined up use the M6x10mm bolt and spring washer to secure the bracket to the pick up. Nip the bolt up, do not tighten.



The bolts can now be tightened. Starting with the 2xM8 bolts holding the pick up to the oil pump, followed by the M6 bolt holding the bracket to cradle and lastly the M6 bolt holding the bracket to the pick up.



And that's it... You're all done. Enjoy & and thank you for supporting TAARKS.