



RB/CA Billet Half Moon Seal Install Guide Part #300008

WARNING! Please read the whole guide before installing this part.

Legals:

TAARKS billet half moons have been designed and is intended for off-road use only. The installation of this part on a vehicle intended for use on public roads may violate laws and regulations in your country/state. Additionally, this part is sold with a LIMITED warranty that only covers defects in manufacturing. This warranty does not cover any damage incurred by using this part. The installation of this part may also void any vehicle warranties. Refer to a performance specialist for proper installation.

After opening the packaging please check to see if any parts are missing or damaged. If something is missing or damaged please contact us immediately. Do not install the product.

Do not modify this part in any way. Modifying the part may result in failure of the part and voids all possible warranties.

Installation Guide

First remove the rocker cover to access the factory rubber half moon seals.



Remove the rubber half moon seals.



Clean any old gasket goo, oil etc from the head in the half moon area and on the front and rear surfaces. Do a final wipe over with acetone or wax & grease remover.




Apply a 3mm bead of liquid gasket maker to the head.



Gently press the new billet half moon seal down onto the head. Gently rocking it back and forth will help seat it. At this point do not push it all the way home. Leave it sitting slightly above the head.



Using a steel ruler or similar straight edge push the seal down until it sits level with the head. The more time and care taken during these steps the better the result.

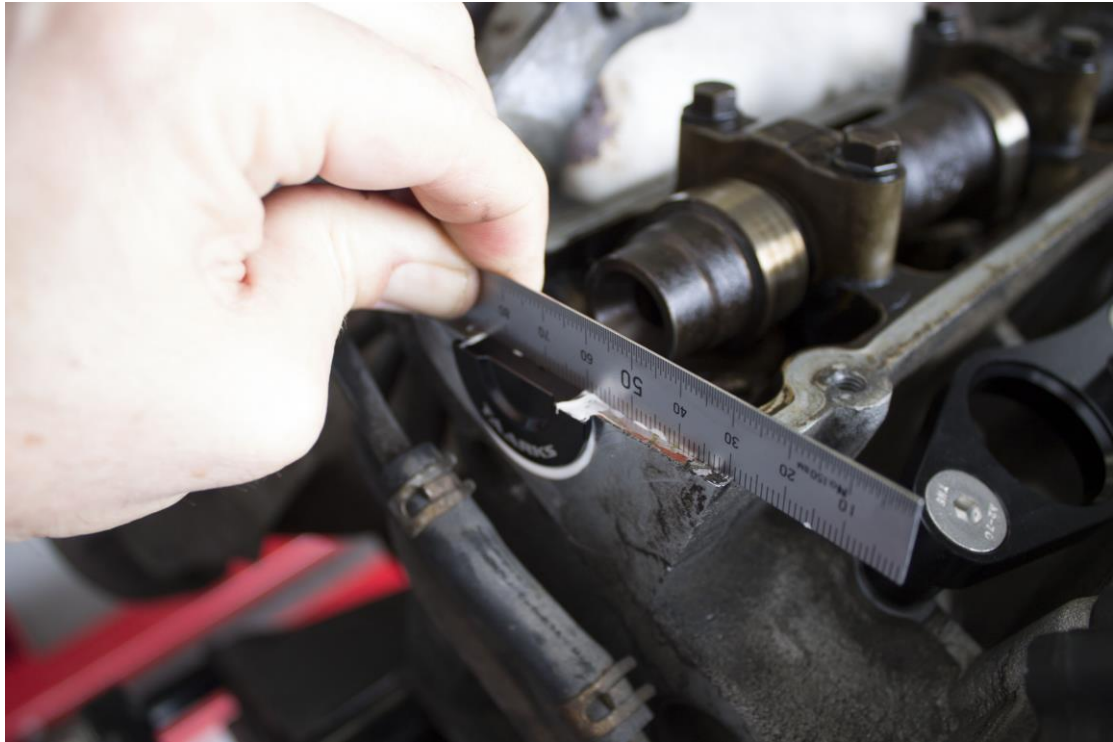

Leave the liquid gasket maker to dry and remove any excess with a knife blade or similar.



And that's it... You're all done. Enjoy & and thank you for supporting TAARKS.